

# MicroClear®

Technical Data Sheet **MB3-5 FILTER CASSETTE** Article-No. 80200045

Completely assembled filtration unit for membrane bioreactor system. Typical application are for treating domestic or industrial wastewater. Replacement of single MCXL2 module (8 m<sup>2</sup>) is possible to maintain minimum operating cost.


The cassette consists of:

- Already activated PVDF membrane modules MicroClear® MCXL2
- Filter housing made of stainless steel SS304 (SS316 optional)
- Membrane tube diffusers with medium sized bubble optimized for the plate distance of the MicroClear® MCXL2 filter module



Parameter	Unit	Value
Dimension of filter cassette (incl. flange for aeration)	L x W x H cm	130 x 238 x 185
Air connection flange	DN/NPS	80 / 3"
Filtrate connection flange	DN/NPS	40 / 1 ½"
Total number of MicroClear® MCXL2 modules		75
Total membrane surface area	m <sup>2</sup>	600
Possible flow <sup>1</sup>		
2 chemical cleanings/year	m <sup>3</sup> /day	375
1 chemical cleaning/year		187.5
Membrane material		PVDF (activated)
Nominal pore size	µm	0.03
Filtration pressure	bar	Up to 0.25
Max. backflush pressure	bar	0.1
Filter housing material		SS304 (SS316 optional)
Diffuser membrane material		EPDM
Total required air flow for scouring	Nm <sup>3</sup> /h	250
Dry weight	kg	Approx. 1300

<sup>1</sup> Depending on wastewater characteristics and operating conditions

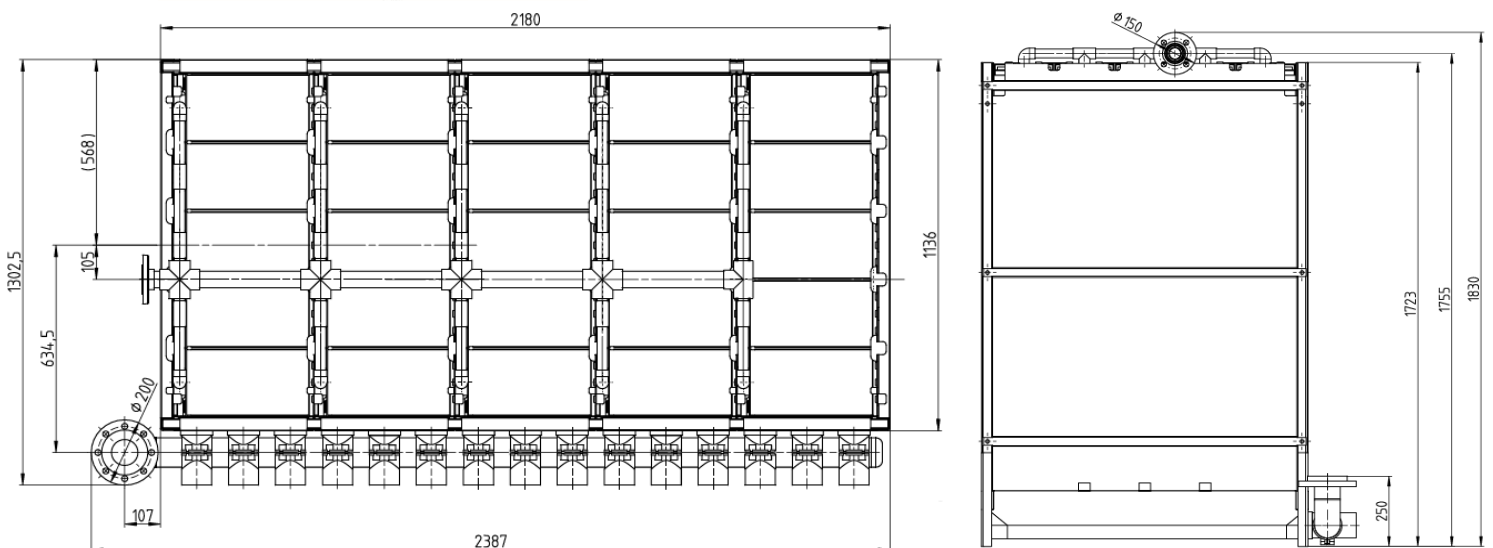

Revised: October 2021

Design and specifications are subject to change without notice